



5GHz WIRELESS CPE OF SURVEILLANCE

WIS-Q300

Version 1.0

Wisnetworks Technologies Co., Ltd.

Sales e-mail: info@wisnetworks.com Web: www.wisnetworks.com

Address: No.77, FuTe West 3 Road, China (Shanghai) Pilot Free Trade Zone

Product Overview

WIS-Q300 is a 300Mbps 2*2 MIMO outdoor wireless CPE for point-to-point and point-to-multi-point solutions. It is the most cost-effective and ultimate solution for WISP CPE, which provides incredible long range much better than any other vendors solution.

Features

Incredible Long Range


- Up to 23dbm Tx Power
- 14dBi dual-polarized directional antenna
- Speed up to 300Mbps
- Narrower Beamwidth for noise immunity



WIS-Q300




Other CPE



Wireless Solutions for Surveillance

- Cost-effective passive PoE
- IP66 Waterproof
- Multiple mounting methods
- Extremely Amazing Performance

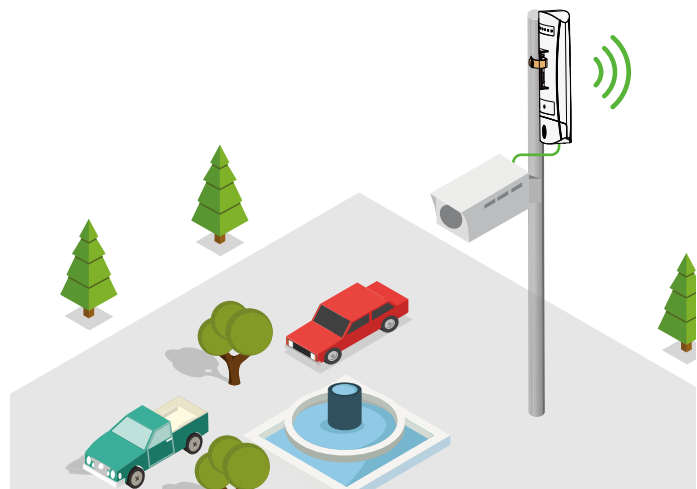

Full Feature & Performance

- Full WisOS Support
- Auto-Distance Adjust
- 3km+ Availability
- Fully Managed by WiController




Features and Benefits

- 14dBi dual-polarized dish antenna to build robust wireless PtP link
- Compliant with 802.11n/a, speed up to 300Mbps
- Wireless Solutions for Surveillance
- 1.5 kilometers throughput 90+
- 40/20/10/5MHz selectable for channel bandwidth
- Easy deployment and adjustment with provided mounting kits
- Passive POE(24VDC) for flexible deployment
- Weather-proof design for outdoor environment
- Up to16kV ESD protection



Network Diagram

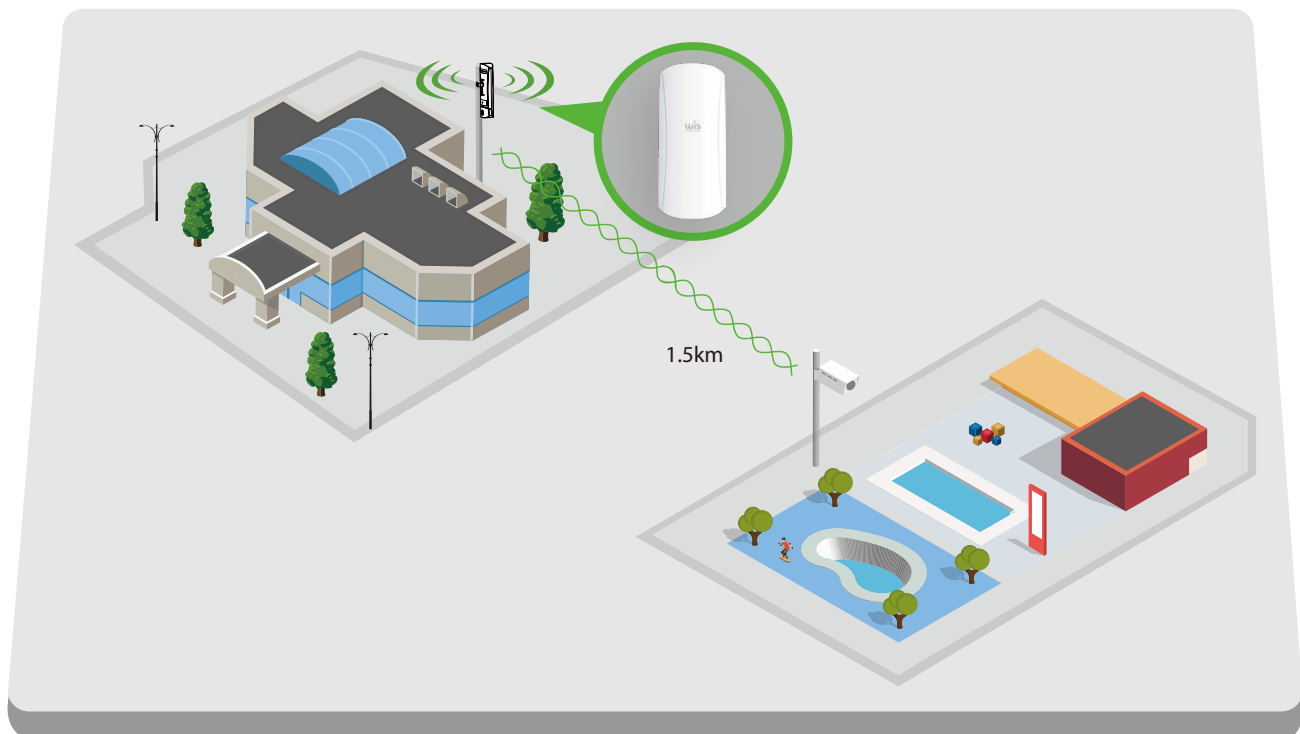

Specification

> Radio

- 802.11a/n radio (Atheros 600MHz)
- Speed up to 300Mbps
- Frequency Range:
 - 5.150-5.250GHz
 - 5.250-5.350GHz (Support DFS)
 - 5.470-5.725GHz(Support DFS)
 - 5.725-5.825GHz
- Tx Power up to 23dbm
- Rx Sensitivity
 - 300M:-71dBm@10% PER
 - 54M:-75dBm@10% PER
 - 1M:-95dBm@10% PER

> Antenna

- 14dBi dual-polarized directional antenna
- Beamwidth(HPBW) Horizontal:45°, Vertical:45°
- Open space 1-4KM

>Physical Parameters

- Dimension:177mm*80mm*65mm
- Weight:0.3kg
- Enclosure: Weatherproof Plastic
- ESD Protection: 15kV
- Lightning Protection: 4kV
- Working Temp: -40~65 °C
- Storage Temp: -40~85 °C
- Working Humidity: 10%~95% non-condensing

>Security

- Integrated Firewall
- WPA/WPA2;WPA-PSK/WPA2-PSK(AES/TKIP)
- Encryption;64/128-bit WEP

> Interfaces

- 1x10/100 Base-T Ethernet (RJ45 with Passive PoE)
- Reset

> LED

- Power: On/Off
- LAN:On/Off/Flashing
- WLAN:On/Off/Flashing
- RSSI Signal:1,2,3

> Power

- 24VDC, 0.75A
- Power Consumption: 6W

>Certification

- CE, RoHS

>Package content

- WIS-Q300
- Quick Setup Guide
- Power Adapter with Passive PoE
- Mounting kits

Antenna Information

